

Art. "AL3L/1" - 3-WAY BALL VALVE "L" DRILLED BALL IN STAINLESS STEEL 316



DESCRIPTION

3-way ball valve with rotary pneumatic actuator.
 Valve body and ball in stainless steel **AISI 316**
 The body valve is obtained from block and polished.
 Ball gasket: Virgin PTFE
 3/2 function (3-way and 2-position)

ALLOWABLE TEMPERATURES

Operating temperature: from -15°C to +100°C
 Max operating temperature for special uses (valve all open):
 +100°C - fuel oils, mineral oils, margarine;
 + 90°C - seawater, drinking water (municipal water system);
 + 60°C - trichloroethylene, butane, methane, propane, carbon dioxide;
 + 40°C - inflammable alcohol, gasoline, illuminating gas, natural gas,
 limewater, soda water.

ACTUATOR PILOT PRESSURE

Double acting versions: from 4 to 8 bar.
 Single acting versions: from 6 to 8 bar
 Connections with inner GAS ISO 228 thread female-female.
 Control air 1/8" GAS connections


VERSIONS AND SIZES

DA: 3/8" - 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2"
 SA: 3/8" - 1/2" - 3/4" - 1" - 1"1/4 - 1"1/2 - 2"

ANODIZING TREATMENT ON OUTSIDE DETAILS

MADE IN ALUMINIUM

L - DRILLED BALL

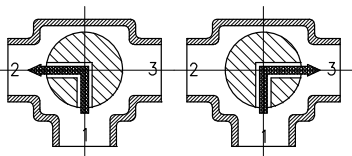

Left deviation 1-2 Right deviation 1-3

RATED PRESSURE "PN"

G	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
PN	40	40	40	40	40	40	25

DOUBLE ACTING

DN	G	ACTUATOR	A	B	C	d	E	F	Wrench	Kv	Weight
mm.		type	mm.	mm.	mm.	mm.	mm.	mm.	mm.	m3/h	gr.
10	3/8"	DE6302	237	214	72	10	77	59	36	2	2050
15	1/2"	DE6302	243	217	82	15	77	67	38	4	2350
20	3/4"	DE8003	281	251	92	20	100	76	47	6	4000
25	1"	DE8003	291	256	102	25	100	86	52	10	4450
32	1"1/4	DE8003	316	273	118	32	100	102	64	20	6300
40	1"1/2	DE8003	332	281	134	40	100	117	80	38	8600
50	2"	DE1004	342	286	144	50	119	127	85	50	11600

SINGLE ACTING

DN	G	ACTUATOR	A	B	C	d	E	F	Wrench	Kv	Weight
mm.		type	mm.	mm.	mm.	mm.	mm.	mm.	mm.	m3/h	gr.
10	3/8"	SE6302	237	214	72	10	77	59	36	2	2200
15	1/2"	SE6302	243	217	82	15	77	67	38	4	2500
20	3/4"	SE8003	281	251	92	20	100	76	47	6	4200
25	1"	SE8003	291	256	102	25	100	86	52	10	4650
32	1"1/4	SE1004	347	305	118	32	119	102	64	20	8400
40	1"1/2	SE1004	363	312	134	40	119	117	80	38	10650
50	2"	SE1004	377	322	144	50	119	127	85	50	11900

OVERALL DIMENSIONS

